stomdevice

Description: stand-alone flag-style installation emergency lighting fitting, suitable for recessed installation. Viewing distance: 25 m.



Body: unbreakable and self-extinguishing UV-stabilized white polycarbonate body.

Optical group: PMMA polycarbonate **diffuser** with smooth, unbreakable and self-extinguishing dust-proof surface, stabilized against **UV rays**.
Signal pictograms available on request (to be ordered separately).
Protection degree **IP40**.


Wiring: Feeding at 220-240V 0/50/60Hz, battery Ni-Cd 3,6V included. Insulation class II. Suitable for installation on flammable surfaces.

- **CEM-SE** version: non-maintained (the fitting only lights up when there is a power failure). Autonomy 1 hour or 3 hours, battery recharge time 24 hours.
- **CEM-SE/SA** version: (possibility of selecting the operation of the fitting in SE mode - emergency only - or SA - always on). Autonomy 1 hour or 3 hours, battery recharge time 24 hours.
- **AUTOTEST** (**CEM-SE/SA.AT**) version: Autonomy 1 hour or 3 hours, battery recharge time 12 hours. Two types of tests are performed automatically:
  Test 1 (performed monthly): Check the operation of the emergency regime for a duration of 5 minutes. Check the battery discharge current. Check the minimum battery voltage.
- **Test 2** (performed annually): Check the functioning of the emergency regime for the entire duration of the autonomy. Check the battery discharge current. Check the minimum battery voltage.

Light source:
High efficiency LED modules, colour temperature 6000K, recommended ambient temperature: between 0°C and +40°C.

Regulations: luminaire in conformity with:

- EN 60598, electrical safety
- EN 55015, EN 61000, electromagnetic compatibility
- EN 60529, protection degree
- EN 1838, emergency lighting
- EN 61347, electrical feeding

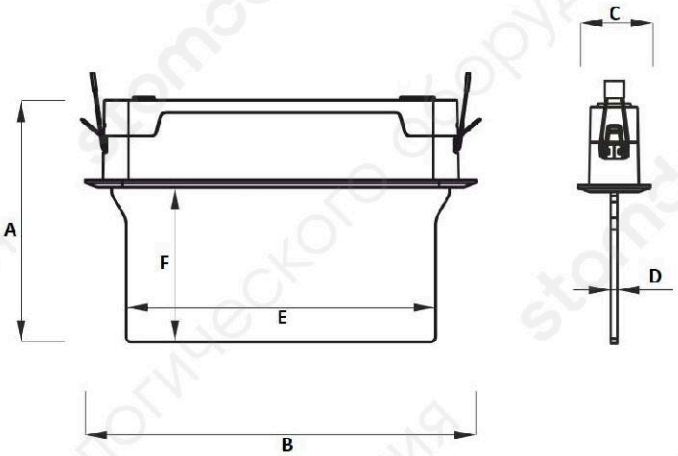

https://stomdevice.ru - стоматологическое и зуботехническое оборудование с доставкой по России и СНГ

stomdevice

		Dimensions [mm]						Codes /Wirings			
W	Source	A	B	C	D	E	F	CEM-SE AUT.1H	CEM-SE/SA AUT.1H	CEM-SE AUT.3H	CEM-SE/SA AUT.3H
1	LED	206	328	62	6	250	125	400100001	400100002	400100006	400100007
2	LED	206	328	62	6	250	125	-	400100003	-	400100008

		Dimensions [mm]						Codes /Wirings			
W	Source	A	B	C	D	E	F	CEM-SE/SA.AT AUT.1H	CEM-SE/SA.AT AUT.3H	-	-
1	LED	206	328	62	6	250	125	400100004	400100009	-	-
2	LED	206	328	62	6	250	125	400100005	400100010	-	-

PICTOGRAMS

- Sticking pictogram dim. 125x250 mm.
  Code PT/M/x (substitute x with the code that identifies the pictogram).


03SX


03DX


04SX


04DX


05SX


05DX




02


08

- Versatile pictogram set dim. 125x250 mm.
  Code PT/M/09


09

- Sticking pictogram down arrow dim. 125x125 mm
  Code PT/M/10
- Sticking pictogram up arrow dim. 125x125 mm
  Code PT/M/11


10 11

- Plexiglass set pictogram dim. 125x250 mm.
  Code PTP/M/x (substitute x with the code that identifies the pictogram).


03SX


03DX


04SX


04DX


05SX


05DX



02


08

https://stomdevice.ru - стоматологическое и зуботехническое оборудование с доставкой по России и СНГ