stomdevice

Description: stand-alone squared **emergency lighting fitting**, direct light LED, suitable for recessed installation on non-inspectable false ceilings. Fixing springs to the false ceiling included.




Body: unbreakable and self-extinguishing UV-stabilized **white polycarbonate** body.

Optical group: **PMMA** optics for the emergency lighting, large beam distribution.
Protection degree **IP20**.

Wiring: Feeding at 220-240Vac 50/60Hz; batteries Ni-Cd 3,6V included. Driver and batteries are in an external independent group with compact dimensions (403x44x32 mm). Insulation class II. It is suitable for the installation on normally inflammable surfaces.


- **CEM-SE** version: with "emergency only" wiring (the lamp lights up only when there is a blackout). 1 or 3 hours autonomy, battery recharge time 24h.
- **CEM-SE/SA** version: (it is possible to select the functioning mode of the device, namely **SE** – emergency only – or **SA** – always turned on). 1 or 3 hours autonomy, battery recharge time 24h.
- **AUTOTEST** (**CEM-SE/SA.AT**) version: 1 or 3 hours autonomy, battery recharge time 12h. Two tests are executed automatically:
  Test 1 (executed monthly): it verifies the functioning of the emergency regime for 5 minutes; it verifies the discharge current of the battery as well as the minimum voltage of the battery.
  Test 2 (executed annually): it verifies the functioning of the emergency regime for all its autonomy; it verifies the discharge current of the battery as well as the minimum voltage of the battery.

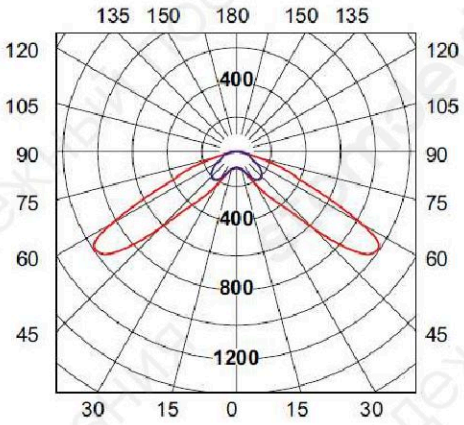


Luminous sources:
High efficiency LED modules, colour temperature 6000K, recommended Ta.: between 0°C and +40°C.

Regulations: luminaire in conformity with:

- EN 60598, electrical safety
- EN 55015, EN 61000, electromagnetic compatibility
- EN 60529, protection degree
- EN 1838, emergency lighting
- EN 61347, electrical feeding

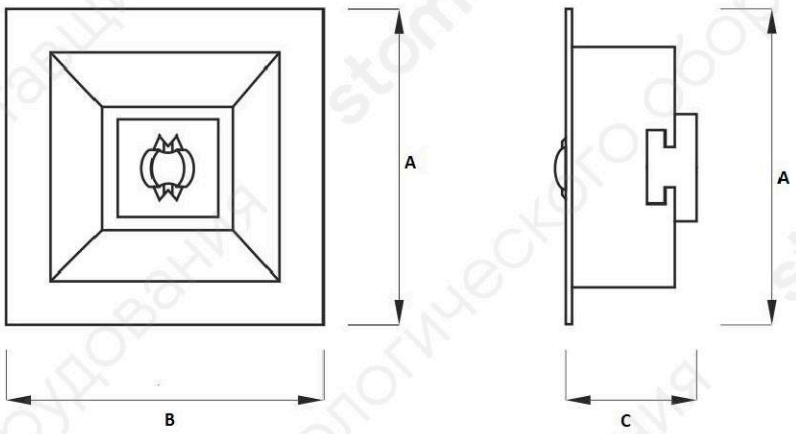



ATENA LUX reserves the right to change dimensions and specifications of luminaires without prior notice.

https://stomdevice.ru - стоматологическое и зуботехническое оборудование с доставкой по России и СНГ

stomdevice

W	Source	Effective flux (lumen)	Dimensions [mm] A	B	C	Codes/Wirings CEM-SE AUT.1H	CEM-SE/SA AUT.1H	CEM-SE AUT.3H	CEM-SE/SA AUT.3H
1	LED	140	95	95	47,7	401300023	401300006	401300026	401300012
2	LED	240	95	95	47,7	-	401300007	-	401300013
3	LED	340	95	95	47,7	-	401300008	-	401300014

W	Source	Effective flux (lumen)	Dimensions [mm] A	B	C	Codes/Wirings CEM-SE/SA.AT AUT.1H	CEM-SE/SA.AT AUT.3H	-	-
1	LED	140	95	95	47,7	401300022	401300027	-	-
2	LED	250	95	95	47,7	401300024	401300028	-	-
3	LED	370	95	95	47,7	401300025	401300029	-	-

https://stomdevice.ru - стоматологическое и зуботехническое оборудование с доставкой по России и СНГ