stomdevice

10 DYNAMIC 2004~2014

DYNAMIC

JIANGSU DYNAMIC MEDICAL TECHNOLOGY CO., LTD.
SHANGHAI DYNAMIC INDUSTRY CO., LTD.

DynAir®

https://stomdevice.ru - стоматологическое и зуботехническое оборудование с доставкой по России и СНГ



Dynamic Group: *Innovator And Leader*

Dynamic is the first corporation which came up with the concept of “silent oil free air compressor”. Dynamic was founded in 2004, which combining R&D, manufacturing and marketing. Dynamic have 3 subsidiary companies in China. We also have set up Dynamic Group (Hongkong) Co.,Ltd. in Hongkong and Dynamic Medical LLC in Unites States.

We are specializing in manufacturing silent oil free air compressors, dental suction units, portable dental units and other dental equipments. Our brands are famous all over the world as “DYNAMIC” and “DYNAIR”.

We have the land area is 30000 m^2 and the first stage building is 7000 m^2. We have more than 20% people work as engineer, and invest more than 5% of our revenue for R&D. We get more than 20 patents each year. As one of the biggest quantity dental equipment manufacture, we supply the full series of products and the best service to our clients.

Our company has obtained ISO9001 and ISO13458 certificates, and all our products have CE certificates, which issued by Germany TUV. All products from Dynamic Group have been exported to more than 100 countries with CE and FDA approved.

Welcome to visit our company, as your partner and your friend, we are always looking forward to creating value for you!

The list of subsidiary company:


Shanghai Dynamic Industry Co.,Ltd.

Jiangsu Dynamic Medical Technology Co.,Ltd.

Kunshan Dynmed Medical Technology Co.,Ltd.

Dynamic Group (Hongkong) Co.,Ltd.

Dynamic Medical LLC

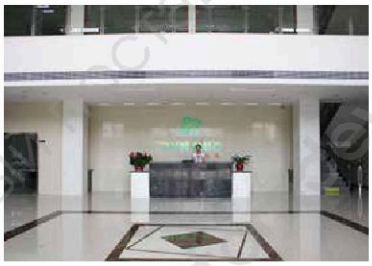

Hall



Training Room



Show Room



Workshop



FDA

Certificate

Dear Official Correspondent:
This document provides notification of the registration number assigned to your establishment:

Establishment Detail

Registration Number:	3009598746
Owner/Operator Number:	10042716
Establishment Name:	Jiangsu Dynamic Medical Technology Co., Ltd.
Establishment Address:	No. 108 Xingpu Road, Lujia Town, Kunshan, Suzhou, Jiangsu 215331, China
Business Type:	Manufacturer and Exporter

Device 510(k) Numbers / Listing Numbers & Device Names & Product Code:

K111907, D167956:	Portable Dental Unit 便携式牙科治疗机	EIA
D167957:	Oral Cavity Suction Unit 口腔抽吸机	EHZ
D168301:	Silent Oil free Air compressor 静音无油空压机	NRD
D168302:	Dental Chair without operative unit 牙科椅	NRU
D168303:	Dental Syringe 三用枪	ECB
D168305:	Saliva Ejector 吸唾器	DYN

Memos:
1) The user can browse the registration information through the following web page: http://www.accessdata.fda.gov/scripts/cdrh/cfdocs/cfRL/rl.cfm

FDA



CE: Air Compressor



CE:Portable Dental Unit



ISO9001-2008



Patent: Suction Unit



Patent: Dental Unit



ISO13485-2003

Index



Air Compressor 03~09

- Silent Oil Free Air Compressor
- Compressor With Air Dryer
- Compressor With Soundproof Cabinet
- Air System
- Compressor Motor
- Spare Parts



Suction Unit 10~13

- Suction Unit
- Suction System
- Compressor & Suction System
- Spare Parts



Dental Unit 14~17

- Portable Dental Unit
- Portable Dental Chair
- Dental Unit
- Spare Parts


https://stomdevice.ru - стоматологическое и зуботехническое оборудование с доставкой по России и СНГ


Silent Oil Free Air Compressor







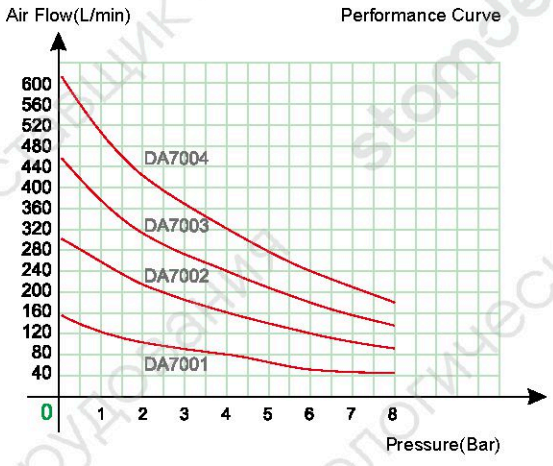

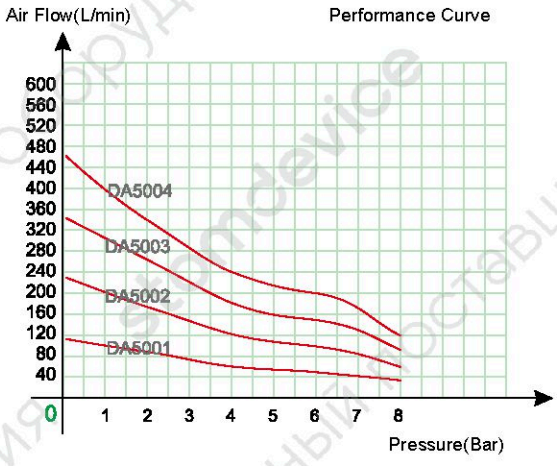

Take Air To Your Heart!


Silent Oil Free Air Compressor


Model		DA7001	DA7002	DA7003	DA7004	DA7005
DynAir®						
Voltage/Hz	V	100-240	100-240	100-240	100-240	100-240
	Hz	50/60	50/60	50/60	50/60	50/60
Power	HP	1	2	3	4	5
	KW	0.75	1.5	2.25	3	3.75
Max Air Flow	L/min	152	304	456	608	760
	CFM	5.37	10.74	16.10	21.47	26.84
Air Flow @7bar	L/min	50	100	150	200	250
	CFM	1.77	3.53	5.3	7.06	8.83
Max. Pressure	Bar	8	8	8	8	8
	psi	116	116	116	116	116
Tank	L	30	50	70	100	140
	Gallon	6.6	11.0	15.4	22.0	30.8
Net Weight	Kg	29.5	50	78	95	110
	Lbs	65.0	110.2	172	209.4	242.5
Gross Weight	Kg	33	62.5	90	114.5	148
	Lbs	72.8	137.8	198.4	252.4	326.3
Noise Level	dB(A)	≤70	≤70	≤70	≤70	≤70
Max current	A	3.4	6.8	10.2	13.6	17
Dimensions	mm	410×410×650	710×425×730	920×425×725	1070×460×750	1430×460×730
	inch	16.1×16.1×25.6	28×16.7×28.7	36.2×16.7×28.5	42.1×18.1×29.5	56.3×18.1×28.7

Model		DA5001	DA5002	DA5003	DA5004	DA5001/4C
DynAir®						
Voltage/Hz	V	100-240	100-240	100-240	100-240	100-240
	Hz	50/60	50/60	50/60	50/60	50/60
Power	HP	0.75	1.5	2.25	3	0.75
	KW	0.55	1.1	1.65	2.2	0.55
Max Air Flow	L/min	115	230	345	460	115
	CFM	4.06	8.12	12.18	16.24	4.06
Air Flow @7bar	L/min	40	80	120	160	40
	CFM	1.41	2.82	4.24	5.65	1.41
Max. Pressure	Bar	8	8	8	8	8
	psi	116	116	116	116	116
Tank	L	22	50	70	100	4
	Gallon	5.8	11.0	15.4	22.0	1.1
Net Weight	Kg	24.5	49	71	89	23.5
	Lbs	53.9	107.8	156.2	195.8	51.7
Gross Weight	Kg	26.5	60	84	117	24.5
	Lbs	58.4	132.3	185.2	258	54
Noise Level	dB(A)	≤70	≤70	≤70	≤70	≤70
Max current	A	2.5	5	7.5	10	2.5
Dimensions	mm	410×410×520	710×425×710	920×425×690	1070×460×730	410×190×480
	inch	16.1×16.1×20.4	28×16.7×28	36.2×16.7×27.2	42.1×18.1×28.7	16.1×7.5×18.9

https://stomdevice.ru - стоматологическое и зуботехническое оборудование с доставкой по России и СНГ

Compressor With Air Dryer

Model		DA7001D	DA7002D	DA7003D	DA7004D
 Air Dryer +  Air Cooler					
Voltage/Hz	V	100-240	100-240	100-240	100-240
	Hz	50/60	50/60	50/60	50/60
Power	HP	1	2	3	4
	KW	0.75	1.5	2.25	3
Max Air Flow	L/min	137	274	410	547
	CFM	4.8	9.6	14.4	19.2
Air Flow @7bar	L/min	45	90	135	180
	CFM	1.59	3.18	4.77	6.35
Max. Pressure	Bar	8	8	8	8
	psi	116	116	116	116
Tank	L	30	50	70	100
	Gallon	6.6	11.0	15.4	22.0
Net Weight	Kg	36	64	89.5	113
	Lbs	79.4	141.1	197.3	249.1
Gross Weight	Kg	47.8	75.5	108.5	133.5
	Lbs	105.4	166.4	239.2	294.3
Noise Level	dB(A)	≤70	≤70	≤70	≤70
Max current	A	3.4	6.8	10.2	13.6
Dew-point Temperature	°C	-20	-20	-20	-20
Dimensions	mm	560×450×650	710×485×750	920×500×750	1070×520×750
	inch	22×17.7×25.6	28×19.1×29.5	36.2×19.7×29.5	42.1×20.5×29.5

Model		DA5001D	DA5002D	DA5003D	DA5004D
 Air Dryer +  Air Cooler					
Voltage/Hz	V	100-240	100-240	100-240	100-240
	Hz	50/60	50/60	50/60	50/60
Power	HP	0.75	1.5	2.25	3
	KW	0.55	1.1	1.65	2.2
Max Air Flow	L/min	104	207	311	414
	CFM	3.7	7.4	11	14.6
Air Flow @7bar	L/min	36	72	108	144
	CFM	1.27	2.54	3.81	5.08
Max. Pressure	Bar	8	8	8	8
	psi	116	116	116	116
Tank	L	22	50	70	100
	Gallon	5.8	11.0	15.4	22.0
Net Weight	Kg	31	56	84.5	108
	Lbs	68.3	123.5	186.3	238.1
Gross Weight	Kg	41.2	70.4	96	145
	Lbs	90.8	155.2	211.6	319.7
Noise Level	dB(A)	≤70	≤70	≤70	≤70
Max current	A	2.5	5	7.5	10
Dew-point Temperature	°C	-20	-20	-20	-20
Dimensions	mm	550×460×520	710×490×750	920×500×750	1070×520×730
	inch	21.7×18.1×20.5	28×19.3×29.5	36.2×19.7×29.5	42.1×20.5×28.7

https://stomdevice.ru - стоматологическое и зуботехническое оборудование с доставкой по России и СНГ

Compressor With Soundproof Cabinet

Model		DA7001CS	DA7002CS	DA7003CS	DA7004CS
DynAir® + Metal Soundproof Cabinet						
Voltage/Hz	V	100-240	100-240	100-240	100-240
	Hz	50/60	50/60	50/60	50/60
Power	HP	1	2	3	4
	KW	0.75	1.5	2.25	3
Max Air Flow	L/min	152	304	456	608
	CFM	5.37	10.74	16.10	21.47
Air Flow @7bar	L/min	50	100	150	200
	CFM	1.77	3.54	5.31	7.08
Max. Pressure	Bar	8	8	8	8
	psi	116	116	116	116
Tank	L	30	50	70	100
	Gallon	6.6	11.0	15.4	22.0
Net Weight	Kg	63	85.5	106	156
	Lbs	138.9	188.5	233.7	343.9
Gross Weight	Kg	75	103.2	143.5	184.1
	Lbs	165.3	227.5	316.4	405.9
Noise Level	dB(A)	≤46	≤46	≤46	≤46
Max current	A	3.4	6.8	10.2	13.6
Dimensions	mm	595×580×795	840×500×820	1140×570×880	1270×575×865
	inch	23.4×22.8×31.3	33.1×19.7×32.3	44.9×22.4×34.6	50×22.6×34.1


Model		DA5001CS	DA5002CS	DA5003CS	DA5004CS
DynAir® + Metal Soundproof Cabinet						
Voltage/Hz	V	100-240	100-240	100-240	100-240
	Hz	50/60	50/60	50/60	50/60
Power	HP	0.75	1.5	2.25	3
	KW	0.55	1.1	1.65	2.2
Max Air Flow	L/min	115	230	345	460
	CFM	4.06	8.12	12.18	16.24
Air Flow @7bar	L/min	40	80	120	160
	CFM	1.41	2.82	4.24	5.65
Max. Pressure	Bar	8	8	8	8
	psi	116	116	116	116
Tank	L	22	50	70	100
	Gallon	5.8	11.0	15.4	22.0
Net Weight	Kg	51.5	81.5	106	156
	Lbs	113.5	179.7	233.7	343.9
Gross Weight	Kg	60.8	96.2	125.1	184.1
	Lbs	134	212.1	275.8	405.9
Noise Level	dB(A)	≤46	≤46	≤46	≤46
Max current	A	2.5	5	7.5	10
Dimensions	mm	595×580×795	840×500×820	1140×570×880	1270×575×865
	inch	23.4×22.8×31.3	33.1×19.7×32.3	44.9×22.4×34.6	50×22.6×34.1


https://stomdevice.ru - стоматологическое и зуботехническое оборудование с доставкой по России и СНГ

stomdevice

Air System



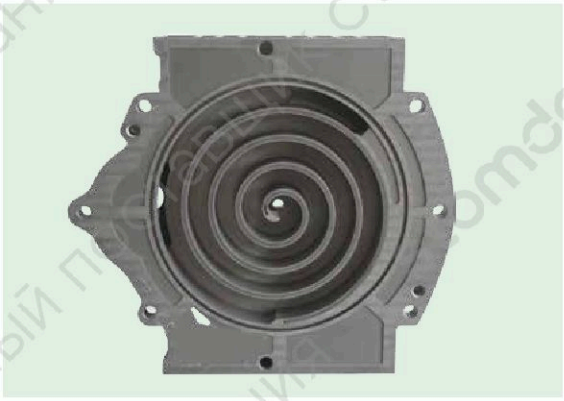

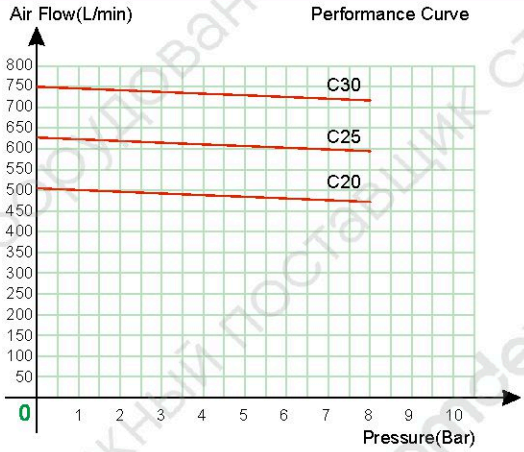

Model	C20	C25	C30
Voltage (V)	380	380	380
Frequency (Hz)	50	50	50
Max Operating Pressure (bar)	8	8	8
Power (KW)	4.5	5.25	6
Air Flow (L/min)	480	600	720
Tank(L)	200	200	200
Noise Level(dB(A))	≤60(±5)	≤60(±5)	≤60(±5)
Net Weight(KG)	360	360	360
Dimensions(mm)	1620×1430×1450	1620×1430×1450	1620×1430×1450

Dynamic air system adopt the oil free scroll technology . It is a kind of newly efficient positive displacement compressor after piston compressor , rotor compressor and screw compressor . It is regarded as fourth generation efficient positive displacement compressor.

Feature :


- Simplified components , operating without metal friction except for bearings
- Tiny airflow pulsation , low noise , more environmentally friendly
- 3 High efficiency of volume .Less internal leakage , high mechanical efficiency
- Easy maintenance
- Three-year or 5000 hours (subject to whichever comes first) compressor motor warranty
- One-year or 2000 hours (subject to whichever comes first) warranty of motor , control circuit and switch


Dynamic can design and produce the air system based on your requirement!

https://stomdevice.ru - стоматологическое и зуботехническое оборудование с доставкой по России и СНГ

Compressor Motor

Model	OF500	OF700	OF850	OF1100
DynAir®				
Volt./Hz	110/60~240/50	110/60~240/50	110/60~240/50	110/60~240/50
Power	550W[3/4HP]	750W[1HP]	850W[1.13HP]	1250W[1.5HP]
Gas Flow (L/min)	115 (40)	152 (50)	170 (60)	195 (118)
Cylinder Stroke (mm)	13	17	17	22
Cylinder Diameter (mm)	63.7	63.7	63.6	63.7
Assemble Size (mm)	224×89	224×89	230×89	248×127
External Size(mm)	270×128×190	270×128×190	270×136×227	315×160×290
G.W(KG)	9.5	11	10.7	17

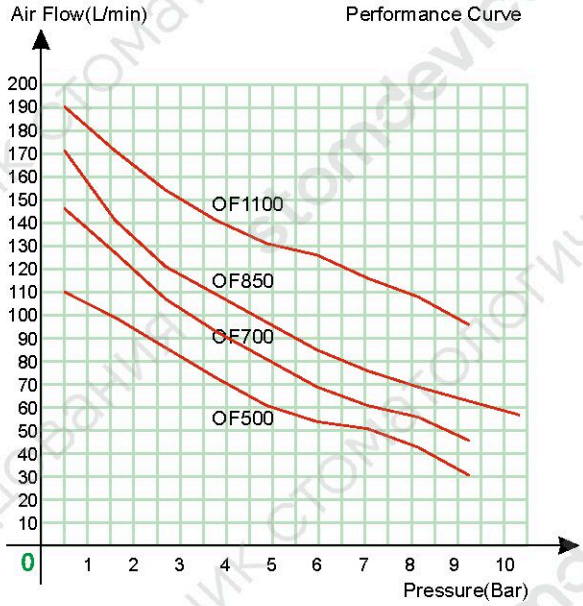

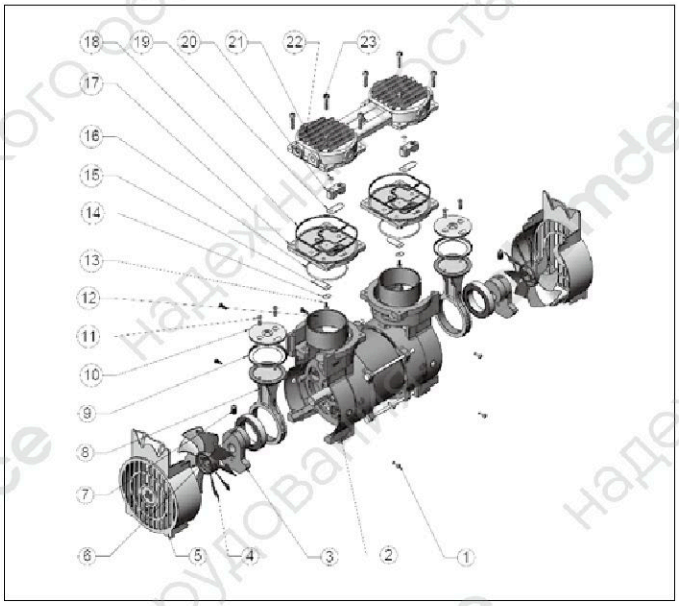

1	Screw of Fan Housing
2	Cast Alu. Shell Units
3	Eccentric Wheel Units
4	Fan
5	Fan Housing
6	Bearing of Eccentric Wheel
7	Screw of Eccentric Wheel
8	Connecting Rod

9	Piston Ring
10	Plate
11	Screw of Plate
12	Cylinder Jacket
13	Screw of Valve
14	Valve Gasket
15	Air Inlet Valve
16	Gasket of Cylinder Jacket

17	Plate Valve
18	Gasket of Cylinder Head
19	Air Outlet Valve
20	Fix Plate
21	Screw of Valve
22	Cylinder Head
23	Screw of Cylinder Head

https://stomdevice.ru - стоматологическое и зуботехническое оборудование с доставкой по России и СНГ

Spare Parts

Electronic:



Pressure Switch
PD5001



Solenoid Valve
PD4001



Capacitor
PD1003



Overload Protector
PD3001 PS0054

Hardware:



Air Filter & Regulator
PW1002



Safety Valve
PW1014



Straight Connector
PW2045



Braided Pipe
PW2003



Pressure Gauge
PW1025



Ball Valve
PW1014



Drain Valve
PW1045



Right-and-left
Threaded Connector
PW2047-1



Elbow Connector
PW2020



Two Male Connector
PW2011



Block Nut
PW2054



Check Valve
PW1022

Plastic:



Air Intake
PS0169



PU Tubing
PF3013



Tank Rubber Foot
PS0010



Motor Rubber Foot
PS0012

https://stomdevice.ru - стоматологическое и зуботехническое оборудование с доставкой по России и СНГ

Suction Unit

Take Air To Your Heart!




Model	DS2501M	DS3701M	DS3701CS-1	DS3701CS-2011	DS7501CS
DYNAMIC					
Volt/Hz	110/60~240/50	110/60~240/50	110/60~240/50	110/60~240/50	110/60~240/50
Power(VA)	500	500	600	600	1200
Vacuum Pressure(Kpa)	-11	-11	-11	-11	-17
Air Flow(L/Min)	250	350	350	350	750
N.W / G.W(KG)	21.8 / 26	26.6 / 31	24.2 / 29	26 / 30	45 / 50
Dimensions(mm)	340×290×760	360×300×784	410×310×350	490×325×490	600×400×652

"Dynamic® " Brand dental surgical aspirator for dental clinic and surgery room.
Non-stop working, high performance, maximum hygiene, and ergonomic.
Do not require any special equipment or assistance
Comfortably located next to dental chair
Facilitate all sort of dental treatments
Assist very well during dental unit's suction failure or insufficiency
High technology motor work 8-10 hours continuously and without regular maintenance
Especially designed, minimize advanced technical support, easily removed
Cabinet designed for maximum agronomy and minimum acoustic and noise level.
Cabinet produced for maximum air circulation against heating by ring blower.
Air/water separator with electronic level control and automatic auxiliary draining pump
Protected against electro-shock
Anti-vibration system and silencer for the exhauster air and non stop suction motor's noise

https://stomdevice.ru - стоматологическое и зуботехническое оборудование с доставкой по России и СНГ

Suction System

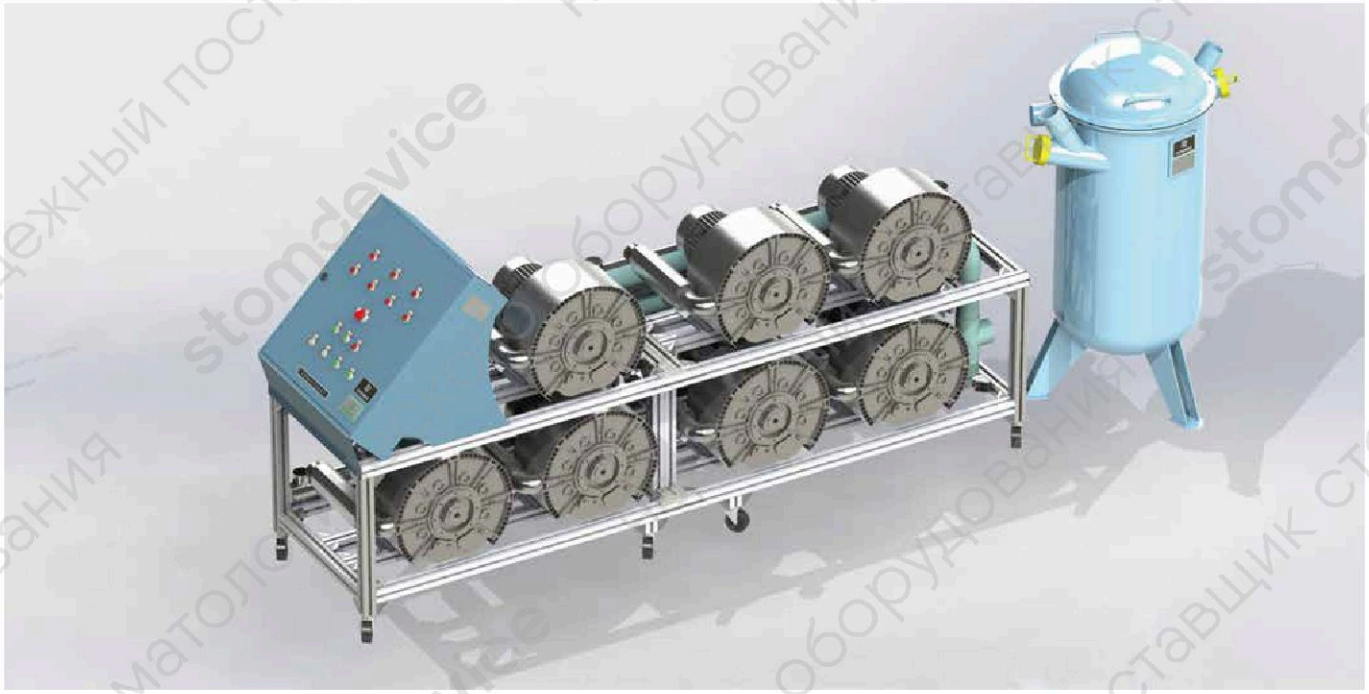

Feature :

- Smallest power , high suction volume , high vacuum .
- Integrated control , easy to operate ..
- Split type design , movable , easy to install .
- Reliable performance , sustainable working .
- Modular structure , could add the additional motor

DS7501CS	C10	C20	C30	C40	C50	C100
Voltage(V)	380	380	380	380	380	380
Frequency (Hz)	30-80	30-80	30-80	30-80	30-80	30-80
Power (KW)	2.2	4.4	6.6	8.8	11	21
Flow Rate (L/Min)	5333	10666	15999	21332	25332	44331
Vacuum (Kpa)	10-35	10-35	10-35	10-35	12-40	12-40
Number Of Chairs With 60% Simultaneity Factor	6	13	20	30	40	60
Number Of Chairs With 100%	10	20	30	40	50	100
Dimensions(mm)	1000×650×1400	1500×650×1400	1500×650×1400	2000×650×1400	2000×650×1400	2600×650×1400
	900×900×1400	900×900×1400	900×900×1400	900×900×1400	900×900×1400	900×900×1400

Dynamic can design and produce the suction system based on your requirement.

https://stomdevice.ru - стоматологическое и зуботехническое оборудование с доставкой по России и СНГ

Compressor & Suction System

Model		DAS001		DAS002	
DYNAMIC					
Voltage	V	110-240	220	110-240	220
Hz	Hz	50/60	50/60	50/60	50/60
Power	KW	0.55	0.37	0.75	0.8
Air Flow	L/min	40	80	50	145
Max. Pressure	Bar	8	/	8	/
Max Current	A	2.5	2.7	3.4	5.2
Max Vacuum	Kpa	/	-11	/	-15
Number Of Workplaces Sf 100%		1		2	
Tank	L	22	/	30	/
Net Weight	Kg	56.5	63	85.5	106
Noise Level	dB(A)	54	53	54	63



Feature :

- Combining compresses air and suction in a single energy centre is a brilliant idea. The technology for all the supply systems required for the treatment is stacked vertically instead of spreading sideways to take up valuable and expensive space.
- Metal construction and a full enclosure all the way round meet the toughest design requirements and blend in with all types of equipment and fittings.
- The laying of supply lines, namely electronic power, suction pipes, compressed air pipes and exhaust air and if necessary drain, run to the central location.
- It is possible to clearly define the installation work required, meaning that the size and scale of the work can be calculated precisely and without any possible misunderstanding.






Dynamic can design and produce the compressor& suction system based on your requirement !

https://stomdevice.ru - стоматологическое и зуботехническое оборудование с доставкой по России и СНГ

Spare Parts

	RB370	RB550	RB750
Voltage (V)	220	220	220
Current (A)	2.7	3.7	5.2
Power(KW)	0.37	0.55	0.8
Max. Air Flow (M^3/H)	80	100	145
Vacuum Pressure(Kpa)	-11	-12	-15
Noise Level dB(A)	53	55	63
N.W(KG)	11	13	15

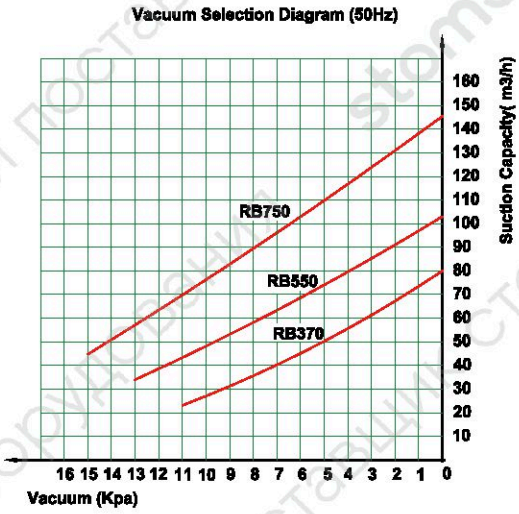



Air and Water Separator
PS0041



Filter
PS0017



Electric Board
PD5019



Water Pump
PLS035



Lock
PW3010



Waterproof Box
PS0210



Connector
PW2090

Portable Dental Unit



Feature :

- **PORTABLE:** Portable box with low weight and rod boxes style to make doctors move it freely.
- **FASHION DESIGN:** Fashionable box design with coated with blue or grey color to make patients feel more comfortable.
- **PERFECT STRUCTURE:** Compact structure consistent with doctor's habits to make them operate more easier.
- **COMPLETE FUNCTION:** The unit consists of related operation system inside the dental treatment unit, such as air system, water system, suction and drainage.
- **SIMPLE OPERATION:** Using when install the parts correctly and connect with power. And the unit controlled with foot control pad.
- **HIGH DURABILITY:** High quality motor with steady performance, solid box to ensure anti-fall, service time exceeds 15,000 hours.
- **FREE MAINTANANCE:** Oil free motor without any lubricated oil, drainage bottle is more convenient to remove and disinfect.
- **ENVIRONMENTALLY FRIENDLY:** Foreign objects attached with germina would be disposed separately to avoid infection.
- **WARRANTY:** 2 years.
- **APPLICATIONS:** Dental Hospital, Dental Clinics, Army and Outdoor Dental Care or Treatment Establishment.

Model		DU852	DU893	DU892	DU895A	DU895	DU896	DU811	DU812
DYNAMIC									
Voltage	V	110-240	110-240	110-240	110-240	110-240	110-240	/	110-240
Hz	Hz	50/60	50/60	50/60	50/60	50/60	50/60	/	50/60
Power	W	550	550	550	550	550	550	1	50
Tank	L	1	4	4	4	4	1	/	/
N.W	KG	26	28	26	31	26	24	26	26
Noise Level	dB	≤60	≤60	≤60	≤60	≤60	≤60	/	/
Dimensions	mm	450×310×680	450×310×680	450×310×680	420×300×570	420×300×480	460X330X410	610×580×850	610×580×850
Standard Features		3-way Syringe Saliva Ejector H.V.E Compressor Scaler Curing Light L.S.H Tube H.S.H Tube	3-way Syringe Saliva Ejector Compressor Scaler Curing Light L.S.H Tube H.S.H Tube	3-way Syringe Saliva Ejector Compressor L.S.H Tube H.S.H Tube	3-way Syringe Compressor L.S.H Tube H.S.H Tube	3-way Syringe Compressor L.S.H Tube H.S.H Tube	3-way Syringe Saliva Ejector Compressor L.S.H Tube H.S.H Tube	3-way Syringe Saliva Ejector L.S.H Tube H.S.H Tube Instrument Tray	3-way Syringe Saliva Ejector Scaler Curing Light L.S.H Tube H.S.H Tube Instrument Tray

https://stomdevice.ru - стоматологическое и зуботехническое оборудование с доставкой по России и СНГ



DU32L

Feature :

- Maximum Load Capacity: 135kg
- Sloping Range: 110°~175°
- Net Weight: 13.2kg
- Folded Size: 86cm×55cm×23cm
- Unfolded Size: 162cm×55cm×53cm

Options :

- Light
- Tray
- Cuspidor
- Portable dentist stool



DS08

Feature :

- Lightweight - Approx. 4 kgs
- Small packing size: 700 x 360 x 260 mm



DLG101

Feature :

- Max Height: 1700mm
- Height Adjustable Range: 750mm
- Hunting Range: 280°
- Net Weight: 2.4kg
- Small Packing Size: 930X140X140






https://stomdevice.ru - стоматологическое и зуботехническое оборудование с доставкой по России и СНГ

Dental Unit



Model	DU3200	DU3500	DU3600	DU3600A	DU3800	DU3900
DYNAMIC						
G.W.(KG)	230	250	250	250	280	280
Dimensions (m)	1.45x1.06x1.06	1.58x1.28x1.06	1.58x1.28x1.06	1.58x1.28x1.06	1.58x1.28x1.06	1.58x1.28x1.06

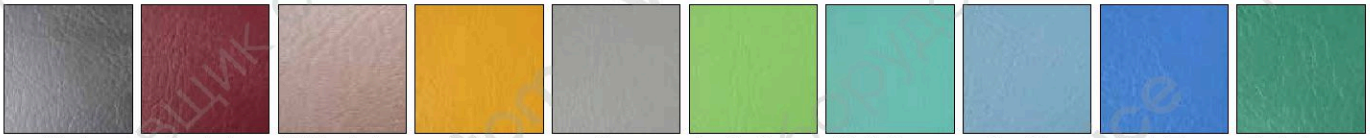

Black #1 | Fuchsia #2 | Off Production #3 | Yellow #4 | Gray #5 | Apple Green #6 | Light Green #7 | Sky Blue #8 | Dark Blue #9 | Dark Green #10



DS01 | DS02 | DS03 | DS04 | DS05 | DS06

https://stomdevice.ru - стоматологическое и зуботехническое оборудование с доставкой по России и СНГ

Spare Parts



3-Way Syringe
PZ1004



High Handpiece
WU4003



Low Handpiece
WU4007&WU4010



Saliva Injection Tube
PZ1006



High Volume Evacuation Tube
PZ1099



Curing Light
WU2071



Scaler
WU2070



Foot Control of Scaler
PZ1146



Water Supply
PS0018



Suction Bottle
PS0019



Fan
PD5013



Pipe
PZ1040



Foot Control Switch
PZ1014



Handpiece Pressure Gauge
PZ1045




Pressure Gauge
PW1027



Mutual Switching Valve
PZ1122

stomdevice

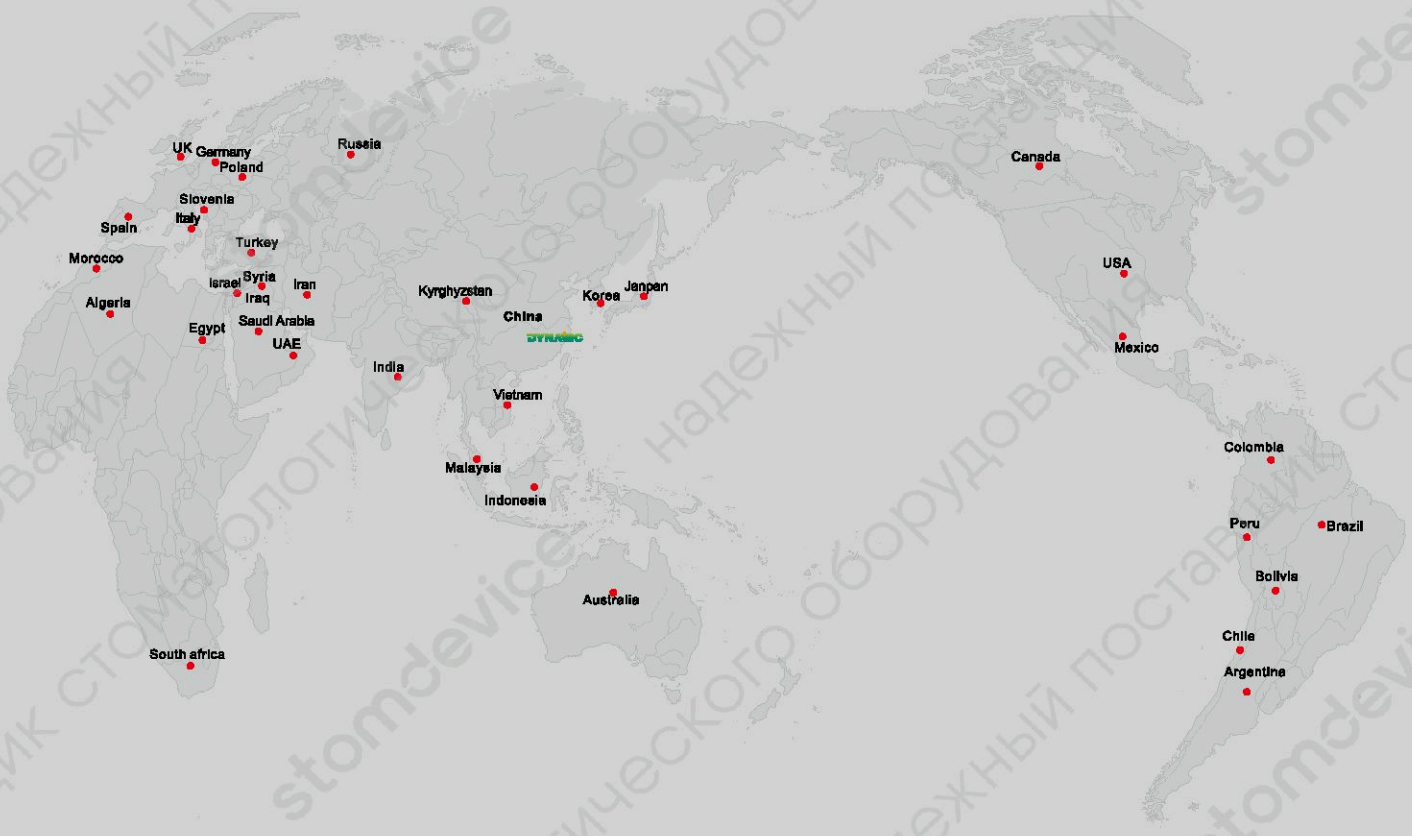

Jiangsu Dynamic Medical Technology Co., Ltd.

Shanghai Dynamic Industry Co., Ltd.

Add: No.108 Xingpu Road, Lujia Town, Kunshan, Jiangsu, 215331, China
TEL: 86-512-82627666
FAX: 86-512-82603908
E-mail: support@dynamicgroup.cn
SKYPE: dynamic-group
Web: www.dynamicgroup.cn

Dealers Contact Information

★ We reserve the right to make changes and improvements to any of the products described without prior notice
★ All the documents, data and pictures on this catalogue are protected by copyrights owned by Jiangsu Dynamic Medical Technology Co.,Ltd.

No. YB-DL-1310-S-1

https://stomdevice.ru - стоматологическое и зуботехническое оборудование с доставкой по России и СНГ